


Manual Film Applicators

ZUA 2000

Universal Film Applicator



Versatility

Applicator for universal use, with adjustable gap height, for preparing uniform films or wedge-shaped layers.



Ease of Use

Simple to use. Adjust to the desired gap height and place on the substrate.





User Experience

Gap heights from 0 -3000 μm with the width from 60 to 220 mm. For manual and automatic film applications.



Instrument



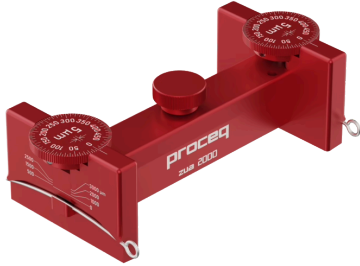

Tech Specs



Adjustable gap heights 0 μm - 3,000 μm (0 mil - 118.11 mil)
Wedge-shaped layer 0 μm - 3,000 μm (0 mil - 118.11 mil)

Measurement Modes	Adjustable gap heights 0 μm - 3,000 μm (0 mil - 118.11 mil) Wedge-shaped layer 0 μm - 3,000 μm (0 mil - 118.11 mil)
Graduation/resolution	5 μm (0.20 mil)
Tolerance	$\pm 10 \mu\text{m}$ (0.39 mil)
Weight	229 g - 479 g (0.50 lbs - 1.06 lbs), depending on version
Warranty	2 years

Our Accessories

Image	PartNumber	Description
	43010923	Proceq Precision-Vacuumpate with a series of holes of 1 mm (0.04") drilling (43010923) Accessories
	43010966	Proceq Precision-Vacuumpate with a series of holes of 0.5 mm (0.02") drilling (43010966) Accessories
	43010906	Proceq Vacuum Pump 230 V with hose (43010906) Accessories
	43010924	Proceq Vacuum Pump 115 V with hose (43010924) Accessories

Standards & Guidelines	Description
ASTM D1640 (Depending on accessory)	
ASTM D4748-10	
ASTM D823	

SWISS  MADE



Present in +100 countries, we serve inspectors and engineers all over the world with the most comprehensive range of InspectionTech solutions, combining intuitive software and Swiss-manufactured sensors.

www.screeningeagle.com

Request a quote

